

HIGH-ACCURACY BAROMETER

FEATURES:

- **High Accuracy**
- **Excellent Long-Term Stability**
- **Low Power Consumption**
- **Instant Warm-Up**
- **Fast Response**

Climatronics High-Accuracy Barometer (P/N 102347) is an ultra-high accuracy barometric pressure transducer mounted in a weatherproof enclosure. It is a form, fit, and function replacement for our previous barometers. Long term reliability and stability in demanding application environments are achieved by the combination of ceramic capacitive sensor and a proprietary custom IC analog circuit.

The fundamentally simple design and thermally stable glass fused ceramic sensing capsule is coupled with the sophisticated capacitance charge-balance type IC circuit where accurate signal conditioning and environmental compensation is performed. Standard accuracy is 0.05% with 0.01% non-repeatability and 0.1%/100°F thermal performance. And even tighter specs are available!

The barometric pressure transducer adheres to strict quality standards including MIL-I-45208A and ANSI-Z540-1. The calibration of the transducer is NIST traceable.

The High-Accuracy Barometer can be provided with a range of either 500 – 1100 hPa or 800 – 1100 hPa.



SPECIFICATIONS

Performance Data

Accuracy :	<±0.05% FS
Non-Linearity	End to point method: ±0.05% FS Best fit straight line method: ±0.03% FS
Hysteresis:	0.01% FS
Non-Repeatability:	0.01% FS
Resolution:	Infinite, limited only by output noise level (0.005% FS)
Thermal Effect **	Compensated Range: 30° to 120°F (-1° to 49°C)
Thermal Zero Shift	Barometric: <±0.2% FS/100°F (±0.18% FS/50°C) Other Ranges: <±0.1% FS/100°F (±0.09% FS/50°C)
Thermal Coefficient Sensitivity:	<±0.1% FS/100°F (±0.09% FS/50°C)
Long Term Stability:	<±0.1% FS over 6 months at 70±F
Static Acceleration Effect:	<±0.01% FS/G
Warm-up:	<±0.04% FS shift after turn on for 20 minutes at constant temperature & pressure.
Time Constant:	<10 ms to reach 90% final output with step function pressure input.

Environmental Data

Operating Temperature:	0° to 175°F (-18° to 80°C)
Storage Temperature:	-65° to 250°F (-54° to 120°)
Vibration:	2 g from 5Hz to 500Hz continuous any axis
Acceleration:	10 g maximum
Shock:	50 g operating, 1/2 sine 10 ms
Pressure fitting:	1/8" -27 NPT internal
Electrical connection:	2 ft. multiconductor cable
Weight (approx.)	9 ounces (0.25 Kg)


Electrical Data

Full Scale Output: **	5.00 VDC, internally adjustable, factory set within ±5 mV
Zero Pressure Output:	0 mV, internally adjustable, factory set within ±5 mV
Excitation Power:	Nominal 24 VDC, 8 mA (0.2 watts), 20 to 32 VDC. Internal regulation minimizes effect of excitation variation, 0.005%
Electrical Circuit: ***	Four-terminal circuit for units with 0 to 5 VDC output
Isolation:	The insulation resistance between all signal leads tied together and case ground is 100 megohms minimum at 25 VDC
Output Impedance	< 5 ohms (effective)
Output Noise	< 200 microvolts RMS (0 Hz to 100 Hz).

* Accuracy as RSS of non-linearity, hysteresis, and non-repeatability. Higher accuracy units available on special order.

** Calibrated into 50K ohm load, operable into loads of 5000 ohms or greater. You can attenuate output to match your data system.

*** For best performance, either negative excitation or negative output should be connected to case. Unit calibrated at the factory with negative excitation connected to case.

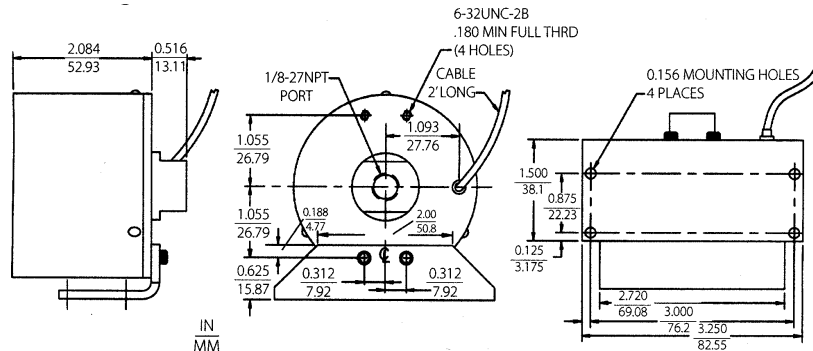

Climatronics Corporation
140 Wilbur Place
Bohemia, NY 11716-2404

TEL: 631-567-7300
FAX: 631-567-7585
E-Mail: sales@climatronics.com