


CSC-932 RS-232C to DCE INTERFACE

FEATURES

- **Asynchronous Transmission up to 9600 bps**
- **No AC Power Required**
- **Compact, Lightweight**
- **Easy to Install**

The CSC-932 RS-232C to DCE Interface provides the interconnection between the IMP series data loggers and the SRM-5A/F Short Haul Modem. The CSC-932 raises the electrical output levels of the signals output by the data logger's communication port from CMOS to the standard for RS-232C to allow the short-haul modem to transmit its signal. Only one CSC-932 is required at the data logger end of the communication cable.

See the SRM-5A/F data sheet for additional details of this efficient communication device.

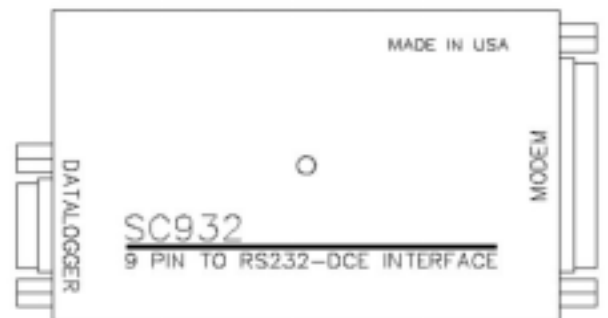

SPECIFICATIONS

DATA RATES	Up to 9,600 bps
ENVIRONMENT	Temperature; 0 to 60 deg C Altitude; Up to 10,000 feet Humidity; Up to 95% non-condensing
PHYSICAL	Length; 2.0 in (50 mm) Width; 2.1 in (52 mm) Height; 0.9 in (22 mm) Weight; 2.5 oz (72 gm)