


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

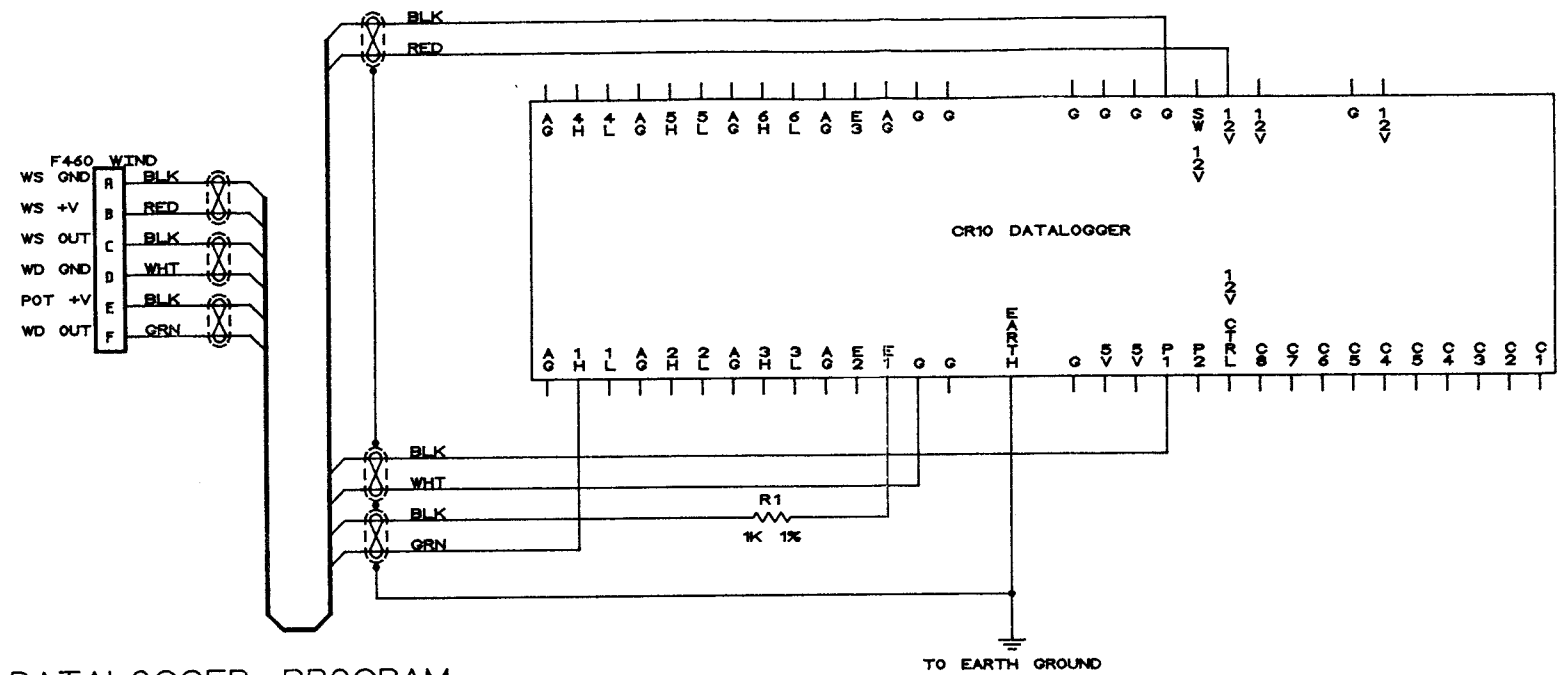

DATALOGGER PROGRAM

```

01: 1.0000  Sec. Execution Interval

01: P3      Pulse ***** MEASURE WIND SPEED SENSOR
01: 1      Rep
02: 1      Pulse Input Chan
03: 20     High frequency; Output Hz.
04: 1      Loc [:WINDSPEED]
05: .10514 Mult (MPH)  M/S = .04699, KTS = .09130
06: .30000 Offset      M/S = .13410, KTS = .26052

02: P4      Excite,Delay,Volts(SE) ***** MEASURE WD SENSOR
01: 1      Rep
02: 25     2500 mV 60 Hz rejection Range
03: 1      IN Chan
04: 1      Excite all reps w/EXchan 1
05: 0000   Delay (units .01sec)
06: 2200   mV Excitation
07: 2      Loc [:DIRECTION]
08: .18000 Mult (DEGREES)
09: 0.0000 Offset
  
```

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		
FRACTIONS	DECIMALS	ANGLES
±	.XX ±	±
±	.XXX ±	±
MATERIAL	CONTRACT NO.	
NOT APPLICABLE	APPROVALS	DATE
FINISH	DRAWN	
NOT APPLICABLE	D. ADAMS	08/94
	CHECKED	
	ISSUED	
DO NOT SCALE DRAWING		

WIRING DIAGRAM F460 WS/WD SENSOR		
SIZE	FSCM NO.	DWG. NO.
B	52332	SK002327
SCALE	SHEET	